



Salvi

Light inspired by you

# Avenue Top



## Avenue Top

A modern and elegant classic that shines everywhere, designed for unique or historic locations. Cast aluminum body for use in street lighting.

Ideal for lighting streets, avenues, pedestrian areas, residential areas, parks and gardens.

# Technical characteristics

<b>Height</b> To be installed from 4 to 9 m	<b>Dimensions</b> 980 × Ø490 mm	<b>Maximum power</b> Maximum power 141W
<b>Peak flow</b>	<b>Weight approx.</b> Approximate weight: 12Kg.	<b>IP / IK</b> IP66 / IK08 / IK10
<b>Colour temperature</b> 3000°K or 4000°K. Optionally available for environmentally friendly areas: amber filter, 2200°K or 2700°K.	<b>FHS</b> < 0.1% (Cierre lenticular y vidrio plano)	<b>CRI</b> Minimum 70
<b>Lifespan</b> L90B10 > 100,000 h (consult according to LED type and configuration).	<b>Voltage</b> AC 220 V - 240 V ~ 50/60 Hz *Class I / Class II optional.	<b>Color</b> Black N1. Other colors available.
<b>Composition</b> Composed of a hexagonal body, top cover and fixing structure in EN AC 44300 type aluminium alloy with low copper content (<0.1%).	<b>Fixing</b> Vertical fixing on support using a 3/4" male thread or with a Ø60mm tube adapter on the support.	<b>Closing/opening</b> Manual opening/closing for tool-free maintenance, a stainless steel telescopic safety rod that keeps the lid open during maintenance, and a silicone seal.
<b>Diffuser</b> Transparent or frosted injected polycarbonate diffuser in the shape of a bucket.	<b>LED system</b> High-efficiency LED system in a circular arrangement. The type and number of LEDs vary depending on the version. There is a version	for every performance, durability, and cost requirement. SNAP optical group with ENEC certification.

**Lenses**

A set of independent lenses of our own design made of optical PMMA with a performance of up to 93%. Optionally, a rear flow-recovery reflector made of injected and aluminized PMMA with a high reflectivity index (95%). The wide range of lenses and reflectors available provides an optimal solution for all photometric needs.


**Standard**

IEC 60598, IEC 62031, IEC 62471, IEC 60529, EN 55015, IEC 61000, IEC 61547, IEC 62493, IEC 62471, IEC 61437, IEC 62384, EN 50102, CE.

**ISO**


ISO 9001, ISO 14001, ISO 45001.

**Proportions**

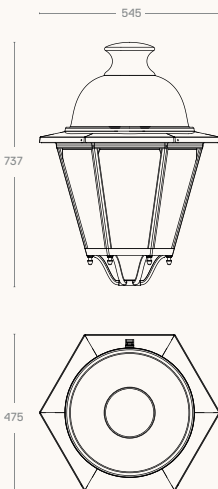


# Photometries / Versions


Longitudinal Narrow F1M6




Longitudinal F2M2




Longitudinal F2MD




Longitudinal angle F3M3



Frontal F4M2



Extensive symmetry F5M1



Please refer to the product configurator for other options.

## Versions

PCB	mA	2700K			3000K	
		W	lm	lm/W	lm	lm/W
085	350	19	2720	143	2960	155
	500	26	3760	144	4080	156
	700	37	4960	134	5360	144
185	350	41	6120	149	6660	162
	500	59	8460	143	9180	155
	600	70	9720	138	10620	151
186	350	41	6120	149	6660	162
	500	59	8460	143	9180	155
	600	70	9720	138	10620	151
16W	350	67	8640	128	9600	143
	500	96	12000	125	13280	138
	500	96	12000	125	13280	138
16Y	350	67	8640	128	9600	143
	500	96	12000	125	13280	138
	500	96	12000	125	13280	138
28W	350	117	15120	129	16800	143
	400	134	19040	142	21000	156
	400	134	19040	142	21000	156
28Z	350	117	15120	129	16800	143
	400	134	19040	142	21000	156
	400	134	19040	142	21000	156
28U	350	64	0	0	9800	153
	500	91	0	0	13440	147
	700	128	0	0	18200	142
28V	350	64	0	0	9800	153
	500	91	0	0	13440	147
	600	109	0	0	15960	146

Avda. del Vallés, 36 - 08185  
Lliçà de Vall - Barcelona, Spain  
www.salvi.es

Light inspired by you  
info@salvi.es  
+34 938 445 190

# Salvi

2025-01 / Due to constant technological evolution, SALVI reserves the right to modify specifications without prior notice. The information contained in this document is for guidance only and does not constitute a contractual commitment.

