



Salvi

Light inspired by you

Circus S Lat




Circus S Lat

A multifunctional, elegant, and minimalist luminaire designed specifically for urban areas. Its great versatility makes it ideal for multi-focus columns.


Ideal for lighting streets, avenues, residential areas, parks and gardens, pedestrian zones.

Technical characteristics

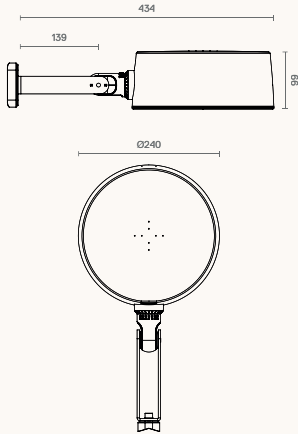
Height To be installed from 3 to 8 m	Dimensions 450 × Ø240× 100mm	Maximum power Maximum power 83W
Peak flow Maximum flux 14080lm.	Weight approx. Approximate weight: 3Kg.	IP / IK IP66 / IK09
Colour temperature 3000°K or 4000°K. Optionally: 2700°K.	FHS < 0.1% (Cierre lenticular y vidrio plano)	CRI Minimum 70
Lifespan L90B10 > 100,000 h (consult according to LED type and configuration).	Voltage AC 220 V - 240 V ~ 50/60 Hz *Class I / Class II optional.	Color Silver Grey G2. Other colors available.
Composition Composed of body, top cover and fixing made of EN AC 44300 cast aluminium with low copper content (<0.1%).	Fixing Side mounting with the ability to orient the luminaire on two axes. Connection to the column via a specific threaded terminal.	Closing/opening Luminaire supplied with cable to prevent tampering with the equipment, access possible using M5 captive screws subject to warranty conditions.
Diffuser PMMA or tempered glass diffuser.	LED system High-efficiency LED system in a circular arrangement. The type and number of LEDs vary depending on the version. There is a version	for every performance, durability, and cost requirement.
Lenses A set of independent lenses of our own design made of optical PMMA with a performance of up to 93%. Optionally, a rear flow-recovery reflector made of injected and aluminized PMMA with a high reflectivity index (95%). The wide range of lenses and reflectors available provides an optimal solution for all photometric needs.	Proportions 	
Standard IEC 60598, IEC 62031, IEC 62471, IEC 60529, EN 55015, IEC 61000, IEC 61547, IEC 62493, IEC 62471, IEC 61437, IEC 62384, EN 50102, CE.		
ISO ISO 9001, ISO 14001, ISO 45001.		

Photometries / Versions


Longitudinal F2M2




Longitudinal Narrow F1M6




Frontal F4M2




Frontal F4MC



Focal P225



Longitudinal F151



Please refer to the product configurator for other options.

Versions

PCB	mA	2700K			3000K	
		W	lm	lm/W	lm	lm/W
16E	350	37	6400	172	6720	181
	500	52	8960	172	9280	178
	800	83	13600	163	14080	169
16F	350	37	6400	172	6720	181
	500	52	8960	172	9280	178

Avda. del Vallés, 36 - 08185
Lliçà de Vall - Barcelona, Spain
www.salvi.es

Light inspired by you
info@salvi.es
+34 938 445 190

Salvi

2025-01 / Due to constant technological evolution, SALVI reserves the right to modify specifications without prior notice. The information contained in this document is for guidance only and does not constitute a contractual commitment.

