



Salvi

Light inspired by you

Gran Via Top

Technical characteristics

Height

To be installed from 4 to 6 m

Dimensions

700 × Ø380 mm

Maximum power

Maximum power 94W

Peak flow

Maximum flux 15680lm.

Weight approx.

Approximate weight: 8Kg.

IP / IK

IP66 / IK08

Colour temperature

3000°K or 4000°K. Optionally: 2200°K or 2700°K.

FHS

< 4,6% difusor translúcido / < 1% difusor transparente

CRI

Minimum 70

Lifespan

L90B10 > 100,000 h (consult according to LED type and configuration).

Voltage

AC 220 V - 240 V ~ 50/60Hz

*Class I / Class II optional.

Color

Black N1. Other colors available.

Composition

Composed of a diffuser globe made of etched glass or frosted polycarbonate, optionally topped by a decorative pinnacle made of cast aluminium, fixed in EN AC 44300 type with low copper content (<0.1%).

Fixing

Vertical mounting. Balloon holder for Ø60 mm tube, Ø3/4" male threaded end, or specially designed for classic columns using a CLS balloon holder.

Closing/opening

Access to the electronic equipment and connection terminals by turning the diffuser 1/4 turn and a silicone sealing gasket.

Diffuser

PMMA diffuser in clear or frosted finish. Optionally available in etched tempered glass and aluminum dome.



LED system

Optical assembly with high-efficiency LEDs in a circular arrangement. SNAP optical assembly with ENEC certification.

Lenses

A set of independent lenses of our own design made of optical PMMA with a performance of up to 93%. Optionally, a rear flow-recovery reflector made of injected and aluminized PMMA with a high reflectivity index (95%). The wide range of lenses and reflectors available provides an optimal solution for all photometric needs.

Proportions

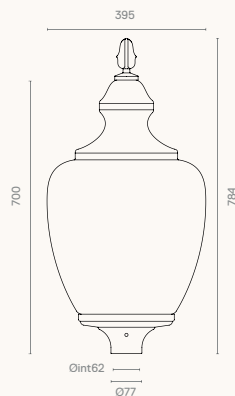

Standard


IEC 60598, IEC 62031, IEC 62471, IEC 60529, EN 55015, IEC 61000, IEC 61547, IEC 62493, IEC 62471, IEC 61437, IEC 62384, EN 50102, CE.

ISO


ISO 9001, ISO 14001, ISO 45001.

Photometries / Versions


Longitudinal Narrow F1M6




Longitudinal F2M2




Longitudinal F2MD




Longitudinal angle F3M3



Frontal F4M2



Extensive symmetry F5M1



Please refer to the product configurator for other options.

Versions

PCB	mA	2700K			3000K	
		W	lm	lm/W	lm	lm/W
165	350	37	5440	147	5920	160
	500	52	7520	144	8160	156
	700	73	9920	135	10720	146
16V	350	37	6400	172	6720	181
	500	52	8960	172	9280	178
	900	94	15040	160	15680	166

Avda. del Vallés, 36 - 08185
Lliçà de Vall - Barcelona, Spain
www.salvi.es

Light inspired by you
info@salvi.es
+34 938 445 190

Salvi

2025-01 / Due to constant technological evolution, SALVI reserves the right to modify specifications without prior notice. The information contained in this document is for guidance only and does not constitute a contractual commitment.

