




Salvi

Light inspired by you

Lan L

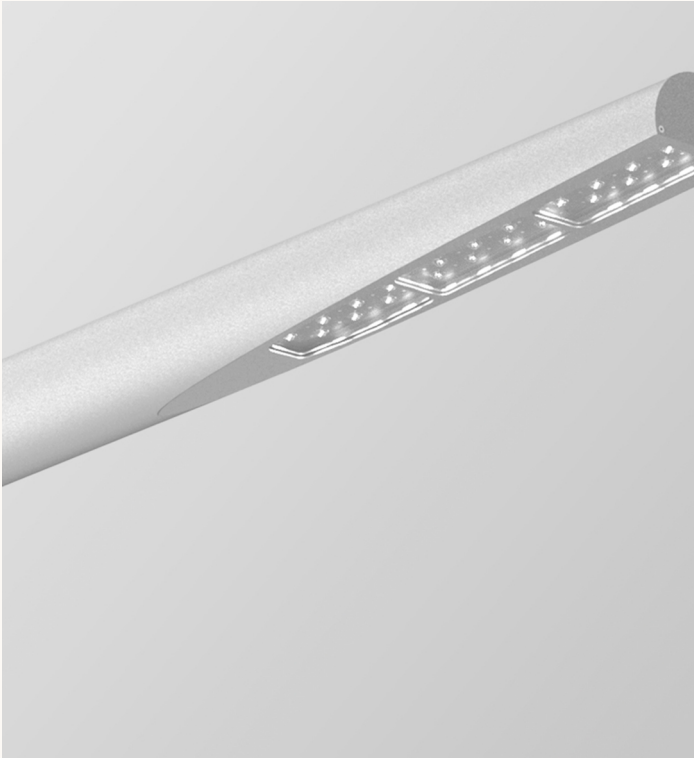


Lan L

Linear luminaire for urban roads using LED technology. Together with the tubular structure column, they form the Lan light source.


Ideal for lighting streets, avenues, residential areas, pedestrian zones.

Technical characteristics

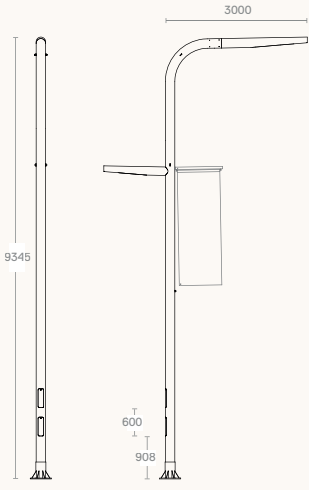
Height 9.2m light spot	Dimensions 1800 × Ø194mm	Maximum power Maximum power 125W
Peak flow Maximum flux 20580lm.	Weight approx. Approximate weight of luminai-	IP / IK IP66 / IK09
Colour temperature 3000°K or 4000°K. Optionally for environmentally protected areas: 2200°K or 2700°K.	FHS < 0,1%	CRI Minimum 70
Lifespan L90B10 > 100,000 h (consult according to LED type and configuration).	Voltage AC 220 V - 240 V ~ 50/60 Hz *Class I / Class II optional.	Color Silver Grey G2. Other colors available.
Composition Composed of a tubular structure made of AA-6063T5 extruded aluminum with low copper content (<0.1%).	Fixing Horizontal fixing on LAN column with special female input.	Closing/opening Access to the equipment through the front cover, fixed to the body with M6 captive screws and a silicone gasket.
Diffuser Tempered flat glass diffuser.	LED system Includes 2 or 3 UPS with high-efficiency LEDs in alternating arrangement.	
Lenses A set of independent lenses of our own design made of optical PMMA with a performance of up to 93%. Optionally, a rear flow-recovery reflector made of injected and aluminized PMMA with a high reflectivity index (95%). The wide range of lenses and reflectors available provides an optimal solution for all photometric needs.	Proportions	
Standard IEC 60598, IEC 62031, IEC 62471, IEC 60529, EN 55015, IEC 61000, IEC 61547, IEC 62493, IEC 62471, IEC 61437, IEC 62384, EN 50102, CE.		
ISO ISO 9001, ISO 14001, ISO 45001.		

Photometries / Versions


Longitudinal Narrow F1M6




Longitudinal F2M2




Longitudinal F2MD




Longitudinal angle F3M3



Frontal F4M2



Symmetric Extensive F5M1



Please refer to the product configurator for other options.

Versions

PCB	mA	2700K			3000K	
		W	lm	lm/W	lm	lm/W
21Z	350	88	11340	128	12600	143
	500	125	15750	126	17430	139
	500	125	15750	126	17430	139
21S	350	48	8400	175	8820	183
	500	69	11760	170	12180	176
	900	123	19740	160	20580	167

Avda. del Vallés, 36 - 08185
Lliçà de Vall - Barcelona, Spain
www.salvi.es

Light inspired by you
info@salvi.es
+34 938 445 190

Salvi

2025-01 / Due to constant technological evolution, SALVI reserves the right to modify specifications without prior notice. The information contained in this document is for guidance only and does not constitute a contractual commitment.

